



del solution



Let There Be Light



Bright as you move!

Smartest tube in the world!

Product overview

Del Solution LED TUBES feature 4FT SMD3528 LEDs and offer 50%+ savings in energy consumption.

Lights are bright effect, high color rendering function, good retrofit available

Applications

Del Solution TUBES can impact energy usage and costs dramatically for hotels, stores, commercial areas etc.

Hospitals, offices, Car parks, Stores, Commercial Shopping Malls

Material

OVAL Aluminum Alloy bottom+PC cover

Operating Circumstance

Input voltage: 90-277VAC

Frequency Range: 47-63HZ

Working Environment Temperature:

-30~+60°



**Order your
smart tubes now!
514 992-7283**

MR16-COB-SHARP



Part Number	DS-MR16-COB-SH
Dimmable	Yes
Lumens	500
Wattage Consumption	5W
Beams Angle	15-30-45-60 Deg
Color Rendering Index	80+
Dimension	φ 50*56mm
Light Decay	3-4% after 3000hrs
Certification	ETL, CE, ROHS
Color	Warm-Sunlight-Cool
Lifetime	50000Hrs

MR16-CREE-XP



Part Number	DS-MR16-CREE-XP
Dimmable	Yes
Lumens	370
Wattage Consumption	5W
Beams Angle	15-30-45-60 Deg
Color Rendering Index	80+
Dimension	φ 50*55mm
Light Decay	3-4% after 3000hrs
Certification	UL, CE, ROHS
Color	Warm-Sunlight-Cool
Lifetime	50000Hrs



PAR20-SHARP



Part Number	DS-PAR20-SHARP
Dimmable	Yes
Lumens	650
Wattage Consumption	6W
Beams Angle	38 Deg
Color Rendering Index	80+
Dimension	φ 62*83mm
Light Decay	3-5% after 3000hrs
Certification	cETLus, CE, ROHS
Color	Warm-Sunlight-Cool
Lifetime	50000Hrs

PAR20-7W



Part Number	DS-PAR20-7W
Dimmable	Yes
Lumens	450
Wattage Consumption	7W
Beams Angle	30-120 Deg
Color Rendering Index	80+
Dimension	φ 62*83mm
Light Decay	4-5% after 3000hrs
Certification	UL, CE, ROHS
Color	Warm-Sunlight-Cool
Lifetime	50000Hrs



PAR30-11W



Part Number	DS-PAR30-11W
Dimmable	Yes
Lumens	800Lm
Wattage Consumption	11W
Beams Angle	30-120 Deg
Color Rendering Index	80+
Dimension	φ 94*110mm
Light Decay	4-5% after 3000hrs
Certification	UL, CE, ROHS
Color	Warm-Sunlight-Cool
Lifetime	50000Hrs

PAR38-16W



Part Number	DS-PAR38-16W
Dimmable	Yes
Lumens	1200
Wattage Consumption	16
Beams Angle	30-120 Deg
Color Rendering Index	80+
Dimension	TBD
Light Decay	4-5% after 3000hrs
Certification	UL, CE, ROHS
Color	Warm-Sunlight-Cool
Lifetime	50000Hrs



A60-7W



Part Number	DS-A60-7W
Dimmable	Yes
Lumens	450Lm
Wattage Consumption	7W
Beams Angle	180 Deg
Color Rendering Index	80+
Dimension	φ 60*117mm
Light Decay	4-5% after 3000hrs
Certification	UL, CE, ROHS
Color	Warm-Sunlight-Cool
Lifetime	50000Hrs

A60-11W



Part Number	DS-A60-11W
Dimmable	Yes
Lumens	TBD
Wattage Consumption	11
Beams Angle	180 Deg
Color Rendering Index	80+
Dimension	TBD
Light Decay	4-5% after 3000hrs
Certification	UL, CE, ROHS
Color	Warm-Sunlight-Cool
Lifetime	50000Hrs



G9-5W



Part Number	DS-G9-5W
Dimmable	Yes
Lumens	350
Wattage Consumption	5W
Beams Angle	360
Color Rendering Index	75
Dimension	φ 30*79mm
Light Decay	4-5% after 3000hrs
Certification	CE, ROHS
Color	2000-4000-6000K
Lifetime	35000Hrs

GU10 Cree



Part Number	DS-GU10-CREE-5W
Dimmable	Yes
Lumens	370
Wattage Consumption	5W
Beams Angle	15-30-45-60 Deg
Color Rendering Index	80+
Dimension	φ 50*55mm
Light Decay	3-4% after 3000hrs
Certification	UL, CE, ROHS
Color	Warm-Sunlight-Cool
Lifetime	50000Hrs



T8-18W



Part Number	DS-SMDT8-18W
LED Full Power	18W EPISTAR 3528SMD
Lumens	1900lm (18W)
Beam Angle	120 Degrees
Color Rendering Index	≥75RA
Dimension	φ26×1200mm
Junction Temperature	<75°
Ambient Humidity	90%
Light Decay	3-4% after 3000HRS
Total Harmonic Distortion	≤5%
Lamp's Efficiency	≥90%
Safety Assurance	DLC ETL CE and RoHS
Life Time	50000HRS

T8-18W Sensor



Part Number	DS-SMDT8-18W-SENSOR
LED Full Power	18W EPISTAR 3528SMD
Sensor Function	5W remained, last 20 seconds when a people steps over
Lumens	1900lm (18W)
Beam Angle	120 Degrees
Color Rendering Index	≥75RA
Dimension	φ26×1200mm
Junction Temperature	<75°
Ambient Humidity	90%
Light Decay	3-4% after 3000HRS
Total Harmonic Distortion	≤5%
Lamp's Efficiency	≥90%
Safety Assurance	ETL CE and RoHS
Life Time	50000HRS



DEL BARS



LED BAR
U-SHAPE ALUMINUM SHELL
Place an order: 514-992-7283

Part Number	Length	Width	Height	Power	Beam Angle	Color Temp	Notes
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	3000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	4000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	5000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	6000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	7000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	8000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	9000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	10000K	


FLOOD LIGHTS



LED Flood Light
Place an order: 514-992-7283

Part Number	Length	Width	Height	Power	Beam Angle	Color Temp	Notes
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	3000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	4000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	5000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	6000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	7000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	8000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	9000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	10000K	

PANEL LIGHTS

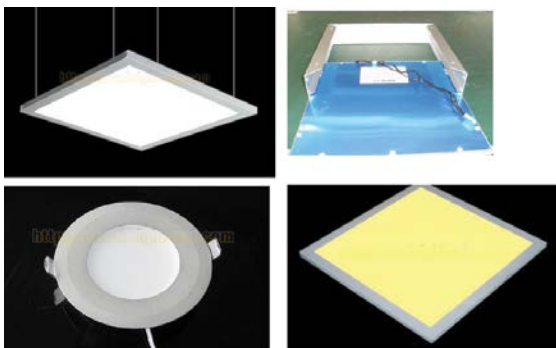

LED Panel Light
Place an order: 514-992-7283

Part Number	Length	Width	Height	Power	Beam Angle	Color Temp	Notes
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	3000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	4000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	5000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	6000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	7000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	8000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	9000K	
DEL-1000-1000	1000mm	100mm	10mm	10W	60°	10000K	





PART NUMBER	QUANTITY
MR16-COB-SHARP	
MR16-CREE-XP	
DS-PAR20-SHARP	
DS-PAR20-7W	
DS-PAR30-11W	
DS-PAR38-16W	
DS-G9-5W	
DS-GU10-CREE	
DS-A60-7WATT	
DS-A60-11WATT	
DS-SMDT8-18W	
DS-SMDT8-18W-SENSOR	

PURCHASE ORDER





del solution

514-992-7283

info@delsolution.com

delsolution.com



DEL SOLUTION
514 992-7283
info@delsolution.com
delsolution.com